


LED Display



 swytch

00

Table of Contents

01 Button Diagram p.3

02 Installation p.4

03 Display Settings p.5

1. Button Diagram



— The LED display is controlled by one button. Read on to learn how to use it.

2. Installation

- 1.1 To fit the LED display, simply open up the clasp and fit around your bikes handlebars.




- 1.2 Tighten the screw on the back of the display using a 2.5mm Allen key.



Check your brakes and gear shifters work as normal.



- 1.3 Connect the green power cable into the green cable coming out from the mount.

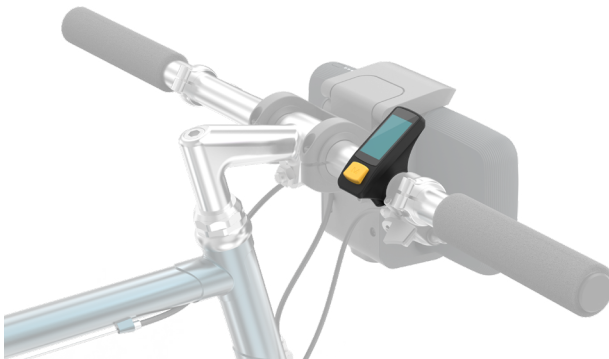

3. Display Settings

1. Power on/off

Press and hold the 'M' button for two seconds until the screen turns on.



Long press - 2 sec

2. Change power level

Short press the 'M' button to change power level.
P0-P1-P2-P3-P4-P5-P0



Short press

3. Open settings menu

Start with the display turned off, **press and hold** the 'M' button for **six seconds** until it cycles through the first screen and onto the next one.

Select your top speed by **short pressing** 'M'. **Double press** 'M' to confirm.



Press and hold - 6 sec

Settings Menu


Unit

Swap between metric and imperial units by **short pressing** 'M'. **Double press** 'M' to confirm selection and move onto the next setting.




Wheel size

Set your wheel size before you ride your kit for the first time. Useful if you're swapping your kit between bikes. Change between different wheel sizes by **short pressing** 'M'. **Double press** 'M' to confirm.

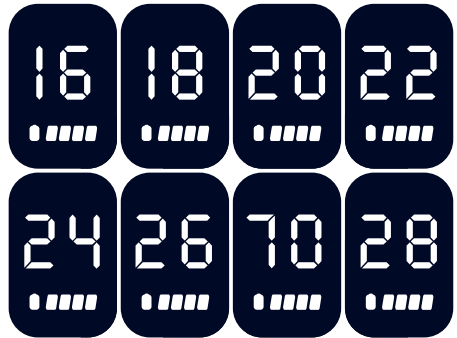

Top speed

Select your top speed by **short pressing** 'M'. **Double press** 'M' to confirm.



To exit settings at any time, **press and hold** the 'M' button until the display turns off.

 s w y t c h